

FLATBED (DIRECT DRIVE)

GOLDEN WHEEL



CS-5100AD-2T/A

Phone/Zalo: 0 9 0 3 6 4 2 2 5
Website: Maymayhoangkhang.com
Email: Maymayhoangkhang@gmail.com

Model	S. P. M.
CS-5100AD-2T/A	4,000
Max. Stitch Length	Lift Of Presser Foot (Hand/Knee)
4mm	5.5mm/13mm
Needle System	Needle Bar Stroke
DBx1 #11 (#9~#18)	31mm
Thickness Of The Sewn Products	
Light~Medium	


Single Needle, Lockstitch, Flatbed Sewing Machine. (Automatic Undertrimming & Automatic Backtacking) (Direct Drive & Integrated Style) (With Neat Seam Beginning Mechanism)

Direct drive & integrated type of design, more energy-saving & more efficiency.

Applied with the newly designed sewing mechanisms in order to achieve the low-tension sewing, the machine flexibly responds to various kinds of materials and produces beautiful seams of consistent quality.

No matter in high-speed or low-speed operation, the machine could obtain the best stitches.

- Automatic lubricating system, smooth and quiet running, easy maintenance and increase the durability of machine.

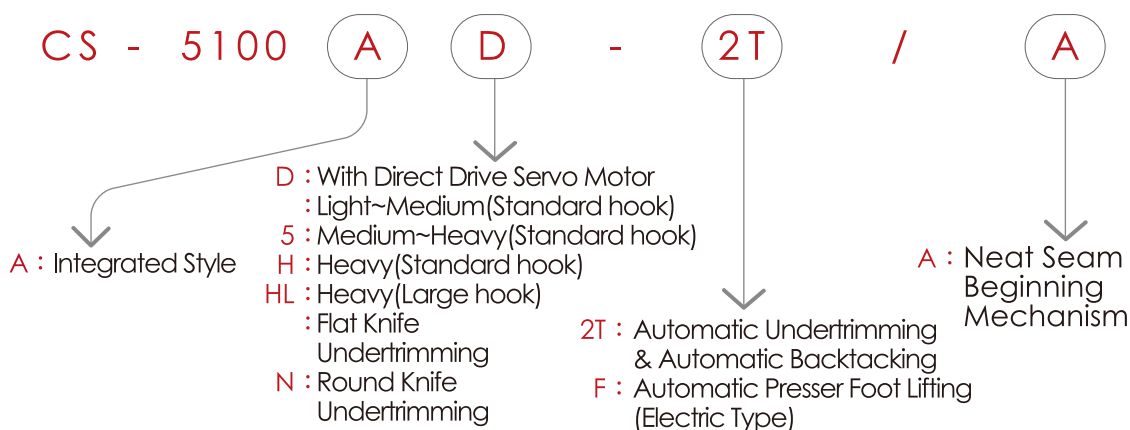

SPECIFICATIONS:

Model	Max. Sewing Speed S. P. M.	Lifting Of Presser Foot (Hand/knee) mm	Max. Stitch Length mm	Needle Bar Stroke mm	Needle System	Autom. Undertrimming	Autom. Backtacking	Neat Seam Beginning	Thickness Of The Sewn Products	Hook System
CS-5100AD-2T/A	4000	5.5/13	4	31	DBx1-11 (#9~#18)				Light~Medium	Standard Hook
CS-5100ADN-2T/A	4000									
CS-5100ADHN-2T/A	3500		7						Heavy	Large Hook
CS-5100ADNHL-2T/A	3200			35	DBx1-21 (#19~#23)					
CS-5100ADN-5-2T/A	3500		5						Medium~Heavy	Standard Hook