




(Automatic

undertrimming)

Direct Drive, Single Needle, Locistitich, Ratibed Sewing Machine, (Minimum oil lubrication) (Automatic undertrimming & backtacking) (For light & material difficult to sew) Direct drive mechanism provided an excellent performance and suitable for various materials.

- Sewing operations are free from the problem of smeary materials.
- Save electricity with economical design.
- Easy to operate and maintain with low noise and slight shake.

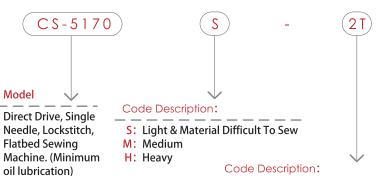

- BT: Automatic Undertrimming & Automatic Backtacking & Automatic Wiper & Operation Box
- 2T: Automatic Undertrimming & Automatic Backtacking
- F: Automatic Presser Foot Lifting (Electric Type)

SPECIFICATIONS:

Mode	I	0	<u>1</u>	₹;	Ī	Ţ	A A A	4	*		<u>*</u>	
		Max. Sewing Speed S.P.M.	Lifting Of Presser Foot (Hand/knee) mm	Max. Stitch Length mm	Needle Bar Stroke mm	Needle System	Automatic Undertrimming	Automatic Backtacking	Automatic Wiper	Operation Box	Thickness Of The Sewn Products	Hook System
CS-51	70S-2T	5000	6/16	4.2	29	DB×1 #11					Limbs	Standard
CS-51	CS-5170S-BT		6/16	4.2	29	(#9~#11)					Light	Hook
CS-51	70M-2T	5000	6/16	5	31	DB×1 #14					Medium	Standard
CS-51	CS-5170M-BT		6/16	5	31	(#11~#18)					Medium	Hook
CS-51	CS-5170H-2T		6/16	5	35	DB×1 #19					Heavy	Standard
CS-51	70H-BT	4500	6/16	5	35	(#19~#22)					nedvy	Hook

•



Direct Drive, Single Needle, Lockstitch, Flatbed Sewing Machine. (Minimum oil lubrication) (For heavy materials) (With automatic undertrimming & automatic backtacking & automatic wiper & operation box)



Direct Drive, Single Needle, Lockstitch, Flatbed Sewing Machine. (Minimum oil lubrication) (For medium materials) (With automatic undertrimming & automatic backtacking & automatic wiper & operation box)