

BAOYU[®]



Phone/Zalo: **0903642225**
Website: Maymayhoangkhang.com
Email: Maymayhoangkhang@gmail.com

全密封型

Fully oil-sealed design without any oil spot

厚料款

Thick material

BML-740AMG-02-460-G2H-GX-ETK-VD/DS

步进导轨切线高速曲臂式四针六线拼缝机
Stepping-rail auto thread-trimming high-speed
feed-off-the-arm type four needle six-thread
flat-seaming sewing machine

● 技术特色 PRIMARY CHARACTERISTIC

适用于一般内衣裤二片布接缝处之拼接缝和补强、男用内裤裤底过骨拼缝，女用紧身衣裤贴条补强，拼缝，双色布料完全密合拼缝等。


Applicable to two pieces fabric for flat seaming the underwear and reinforce the join place. For example, the flat seaming on cross lap of men's underpants bottom, the taping for reinforcing the chemise, the flat seaming different color fabric etc.



外置式差动调节旋钮

外置式差动调节旋钮，可轻松微调差动，适应各种面料；


The external differential adjustment knob can easily fine-tune the differential and adapt to various fabrics;

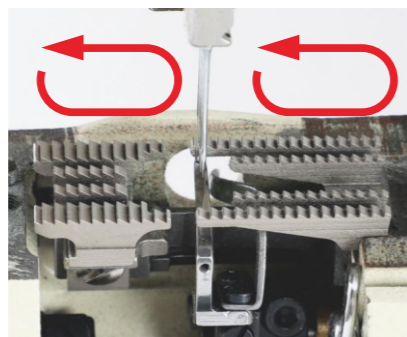

双差动牙齿

双差动设计，双齿均可调节差动，有效解决起皱、打褶的情况，适用于各种厚、薄以及弹性等多种面料；

Double differential design, both teeth can adjust the differential, effectively solve the problem of wrinkling and pleating, suitable for a variety of thick, thin and elastic fabrics;

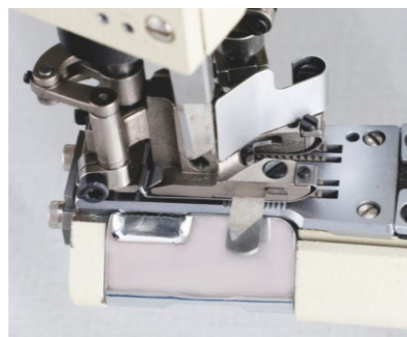

宽刀压脚

压脚采用宽刀深槽设计，过骨顺畅，切条平整；

The presser foot adopts the design of wide knife and deep groove, which can pass the bone smoothly and cut the strip smoothly;

用技术创造价值
CREATE VALUE WITH TECHNOLOGY



Phone/Zalo: **0903642225**
Website: Maymayhoangkhang.com
Email: Maymayhoangkhang@gmail.com

全密封型

Fully oil-sealed design without any oil spot

基础款

Basic


BML-740AMG-02-452-G2-VD/DS

步进高速曲臂式四针六线拼缝机
Stepping rail high-speed feed-off-the-arm
type four-needle six-thread flat-seaming
sewing machine

● 技术特色 PRIMARY CHARACTERISTIC

适用于一般内衣裤二片布接缝处之拼接缝和补强、男用内裤裤底过骨拼缝，女用紧身衣裤贴条补强，拼缝，双色布料完全密合拼缝等。


Applicable to two pieces fabric for flat seaming the underwear and reinforce the join place. For example, the flat seaming on cross lap of men's underpants bottom, the taping for reinforcing the chemise, the flat seaming different color fabric etc.

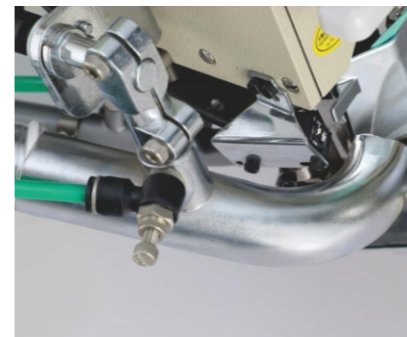

吸布屑管组

万向可调节吸风装置，可依客户需求任意调整位置，内置进气管，吸力强劲；


Universal adjustable suction device, which can be adjusted arbitrarily according to customer needs, built-in air intake pipe, strong suction;

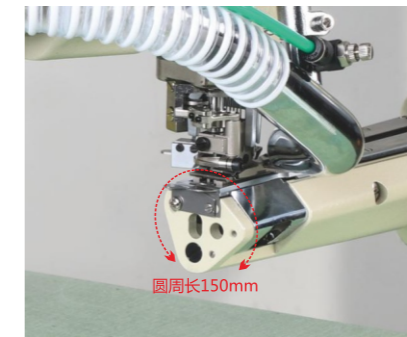

小筒型设计

采用小筒型设计，圆周长150mm，可车缝袖口直径70mm，车缝小口径的针织物，更加便利。

The design adopts a small tube type, a circumference of 150mm, a diameter of 70mm sleeve, and a small diameter knitted fabric, which is more convenient.

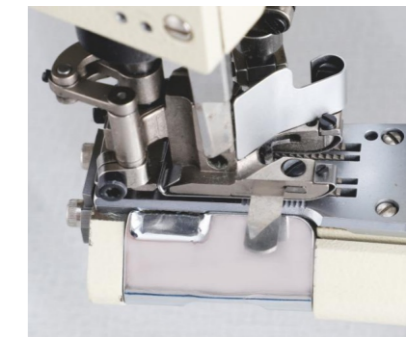

弹片式压脚

弹片式压脚机构的使用，使内衣用薄布料及高弹性面料都能轻松应对。

The design of the machine can handle thin underwear material and highly elastic material.